



A3OZ EnviroceL[®]


This sensor is one of a range for monitoring gases at levels found in the environment. It is designed to give accurate readings of O₃ or NO₂ in ambient air.

Performance Characteristics

| | |
|--|------------------------------|
| Nominal Range | 0-10ppm |
| Maximum Overload | 100ppm |
| Expected Operating Life | Two years |
| Output Signal | 2.2 ± 0.5 µA/ppm |
| Resolution at 20°C | 20ppb |
| Temperature Range | -20°C to +50°C |
| Pressure Range | Atmospheric ± 10% |
| Pressure Coefficient | No data |
| T₉₀ Response Time | <40 seconds |
| Relative Humidity Range | 15 to 90% non-condensing |
| Typical Baseline Range (pure air) | 0 to 0.1ppm equivalent |
| Maximum Zero Shift (+20°C to +40°C) | 0.1ppm equivalent |
| Typical Long Term Output Drift | <10% signal loss/year in air |
| Recommended Load Resistor | 33Ω |
| Bias Voltage | Not required |
| Repeatability | 1% of signal |
| Output Linearity | Linear |

N.B. All performance data is based on conditions at 20°C, 50%RH, and 1013mBar

Outline Dimensions

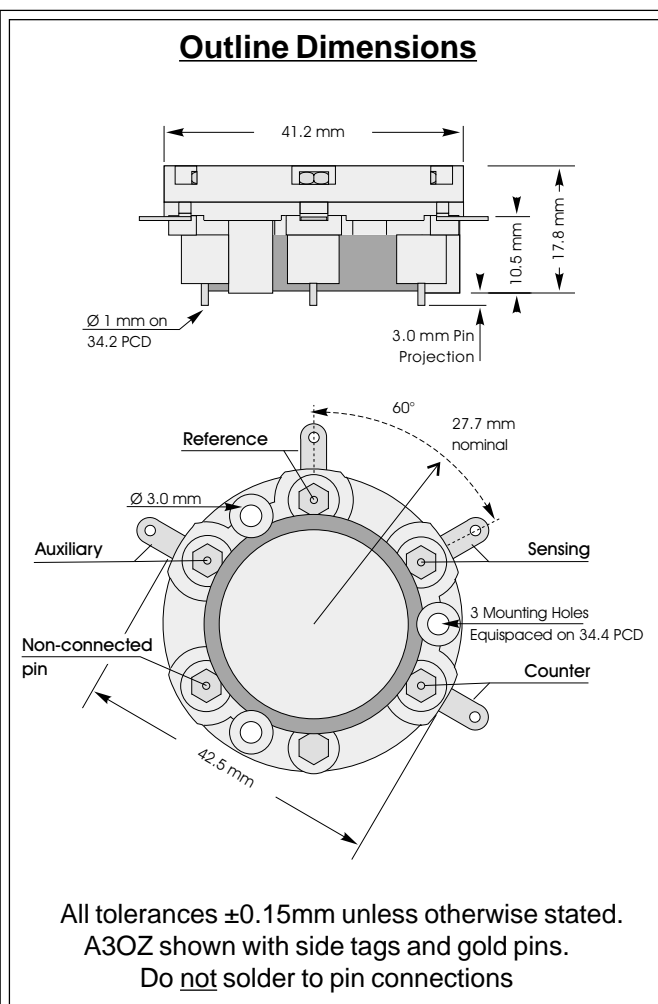

Physical Characteristics

| | |
|--|---------------------------------|
| Material | Polycarbonate |
| Weight | 22g |
| Position Sensitivity | None |
| Storage Life | Six months in CTL container |
| Recommended Storage Temperature | 0-20°C |
| Warranty Period | 12 months from date of despatch |

Cross-Sensitivity Data

| | |
|--------------------------|------|
| Carbon monoxide | None |
| Nitrogen Dioxide | 100% |
| Chlorine | 100% |
| Sulphur Dioxide | None |
| Hydrogen Sulphide | None |

Doc. Ref.: A3OZ.p65
Issue 1.5 Jan 10, 2001

Circuitry required

The A3OZ EnviroceL differs from standard three electrode sensors by the introduction of a second working electrode, known as the **Auxiliary**. A suitable operating circuit is shown below.


Figure 1.

A3OZ Operating Circuit

IC1 - This amplifier should have either a low offset or have its offset nulled out. The PMI OP-77, OP-90, Intersil or Teledyne 7650, and Linear Technology LT1078 are all suitable.

IC2, IC3 - This amplifier acts as a current to voltage converter and its offset performance is less critical. The OP-77 or similar is a suitable choice

Recommended value of R_{load} is given in the specification overleaf.

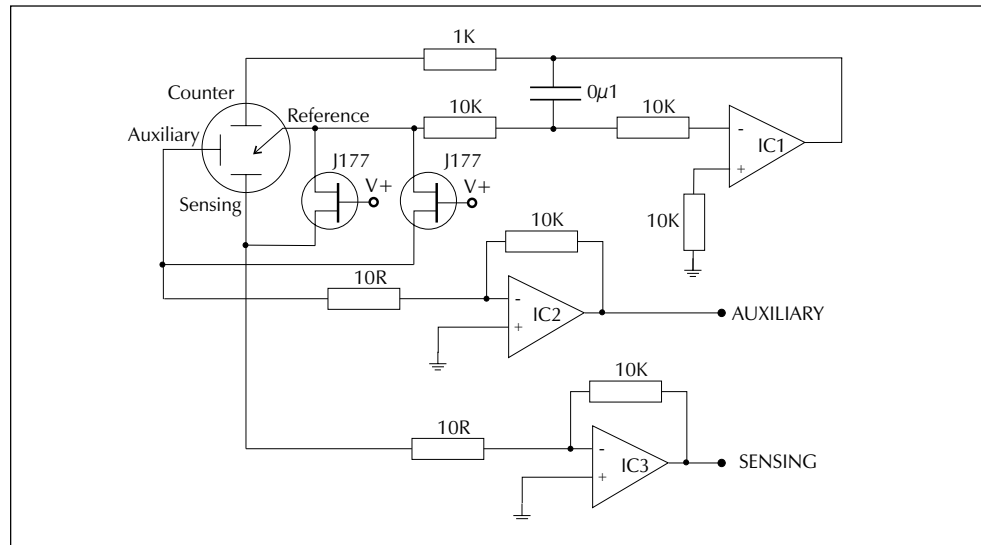

When no gas is present, there is a small zero gas (baseline) signal from each electrode. Upon exposure to nitrogen dioxide/ozone, the *sensing* electrode produces a signal proportional to the concentration of gas. Virtually all the gas is reacted on contact with this electrode, so the *auxiliary* electrode remains largely unaffected and hence the signal remains at its baseline level. It can therefore be assumed the *auxiliary* signal is wholly attributed to the baseline.

The baseline signal of both electrodes is slightly affected by changes in atmospheric conditions (e.g. temperature). However as both are subject to the same conditions, any shift in baseline on the *sensing* electrode will be followed by a similar shift in the *auxiliary*. Hence by comparing the two signals any baseline changes may be compensated.

Evaluating the nitrogen dioxide/ozone concentration of a sample from the two signals is a straightforward subtraction:-

Let:

I_S = *Sensing* electrode signal;
 I_A = *Auxiliary* electrode signal;
 I_{gas} = Baseline compensated nitrogen dioxide/ozone signal.

Then

$$I_{gas} = I_S - I_A$$