



# 4HN CiTiceL<sup>®</sup>

## Performance Characteristics


<b>Nominal Range</b>	0-50ppm
<b>Maximum Overload</b>	100ppm
<b>Expected Operating Life</b>	Two years in air
<b>Output Signal</b>	0.10 ± 0.02 µA/ppm
<b>Resolution</b>	0.5ppm
<b>Temperature Range</b>	-20°C to +50°C
<b>Pressure Range</b>	Atmospheric ± 10%
<b>Pressure Coefficient</b>	No data
<b>T<sub>90</sub> Response Time</b>	<200 seconds
<b>Relative Humidity Range</b>	15 to 90% non-condensing
<b>Typical Baseline Range (pure air)</b>	-0.5ppm to +0.5ppm equiv.
<b>Maximum Zero Shift (+20°C to +40°C)</b>	1ppm
<b>Long Term Output Drift</b>	<2% signal loss/month
<b>Recommended Load Resistor</b>	10Ω
<b>Bias Voltage</b>	Not required
<b>Repeatability</b>	<2% of signal
<b>Output Linearity</b>	Linear

N.B. All performance data is based on conditions at 20°C, 50%RH, and 1013mBar

## Physical Characteristics

<b>Weight</b>	5g (approx.)
<b>Position Sensitivity</b>	None
<b>Storage Life</b>	Six months in CTL container
<b>Recommended Storage Temperature</b>	0-20°C
<b>Warranty Period</b>	12 months from date of despatch

## Outline Dimensions

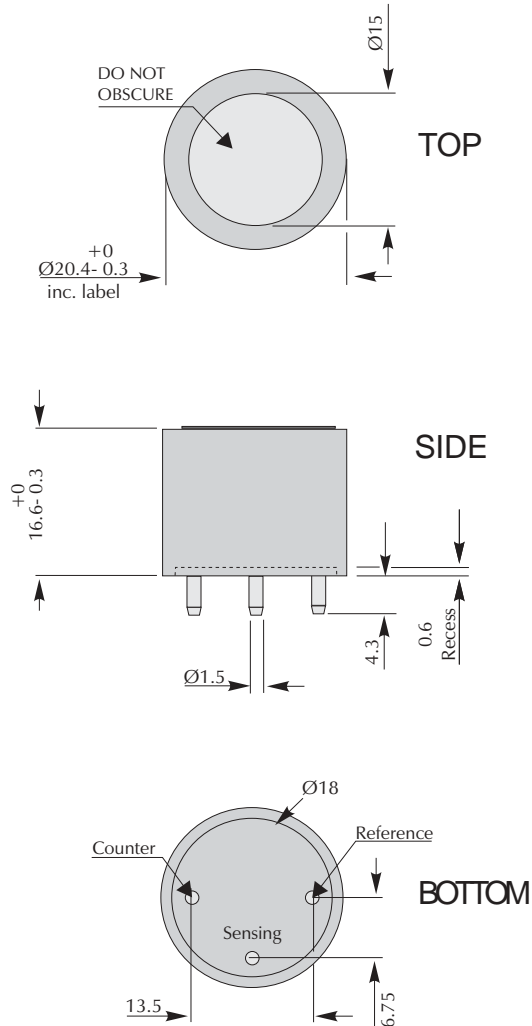


All dimensions in mm  
All tolerances ±0.15mm unless otherwise stated

**IMPORTANT NOTE:** Connection should be made via PCB sockets only. Soldering to the pins will seriously damage your sensor.


# Hydrogen cyanide CiTiceL<sup>®</sup> Specification



4HN Hydrogen Cyanide CiTiceL - Output vs Temperature

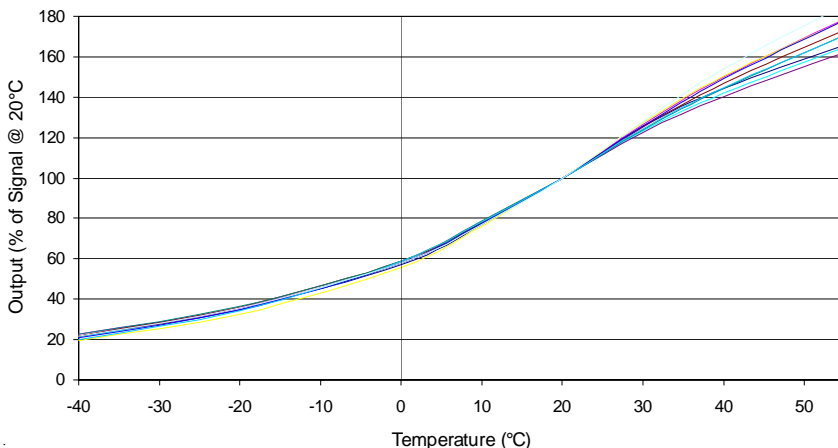

4HN Hydrogen Cyanide CiTiceL - Baseline vs Temperature

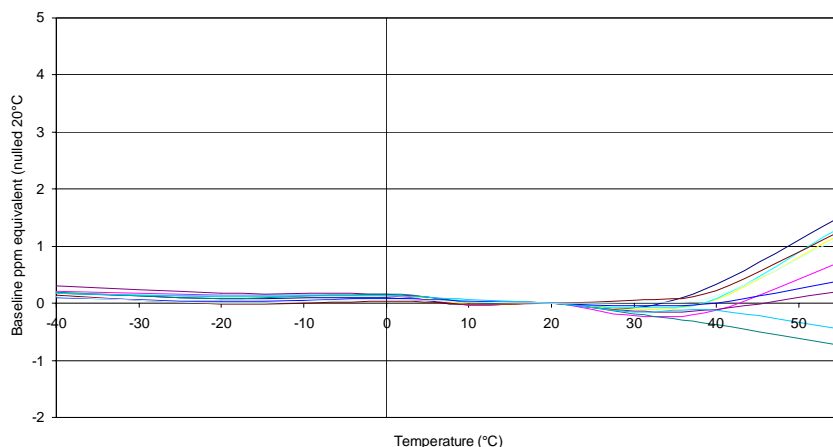

Distributed by:  
 Shawcity Ltd  
 91-92 Shrivenham Hundred Business Park  
 Watchfield, Oxfordshire, SN6 8TY  
 Tel: 01793 780622  
 Email: sensororders@shawcity.co.uk  
 www.shawcity.co.uk

## Cross-sensitivity Data

CiTiceLs may exhibit a response to certain gases in a sample other than the target gas. 4HN CiTiceLs have been tested with a number of commonly cross-interfering gases and the results are given below. The table shows the typical response to be expected from a sensor when exposed to a given test gas concentration (relevant to safety, e.g. TLV levels).

<u>Gas</u>	<u>Conc.</u>	<u>4HN</u>	<u>Gas</u>	<u>Conc.</u>	<u>4HN</u>
<b>Carbon monoxide:</b>	300ppm	<15ppm	<b>Nitric oxide:</b>	35ppm	-28<x\$<0ppm
<b>Hydrogen sulphide</b>	15ppm	~90ppm	<b>Nitrogen dioxide:</b>	5ppm	-20<x\$<-10ppm
<b>Sulphur Dioxide:</b>	20ppm	40<x\$<75ppm	<b>Ethylene:</b>	100ppm	<25ppm

\*\*For details of other possible cross-interfering gases contact City Technology.\*\*

Note: Due to a very high cross sensitivity, this sensor is unsuitable for use in atmospheres which contain hydrogen sulphide.

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement City Technology Limited reserves the right to make product changes without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale. The products are always subject to a programme of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of City Technology Limited, we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application.

Performance characteristics on this data sheet outline the performance of newly supplied sensors. Output signal can drift below the lower limit over time.