

Ammonia

SensoriC NH3 3E 1000



SensoriC NH3 3E 1000

FEATURES

Amperometric 3 electrode sensor cell Fixed organic gel electrolyte No CO2 interference 0 volt bias operation

TYPICAL APPLICATIONS

TLV-monitoring, leakage detection Fixed point applications in cold storages & refrigeration plants No background concentrations of ammonia *

PART NUMBER INFORMATION

 SENSORIC CLASSIC
 1854-031-03069

 CTL 4 series adaptation
 1854-031-04049

 CTL 7 series adaptation
 1854-031-07079

Note:

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Rev. 09/2006

^{*} Background concentrations of ammonia might shorten life time of sensor .

SensoriC NH3 3E 1000

TECHNICAL SPECIFICATIONS

Measuring Range 0–1000 ppm

Sensitivity Range 6 nA/ppm ± 3 nA/ppm

Zero Current at 20°C <± 40 nA Resolution at 20°C <15 ppm

Bias Potential 0 mV

Linearity <5% full scale

Response Time at 20°C

t50 <20 s calculated from 5 min. exposure time t90 <120 s calculated from 5 min. exposure time

Long Term Sensitivity Drift <10% per 6 months

Operation Conditions

Temperature Range -40°C to +40°C

Humidity Range 15–90% r.H, non–condensing

Effect of Humidity an abrupt change of r.H. will cause a short term drift of zero

reading

Sensor Life Expectancy > 18 months in air


Warranty 12 months

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



SensoriC NH3 3E 1000

OUTPUT vs. TEMPERATURE:

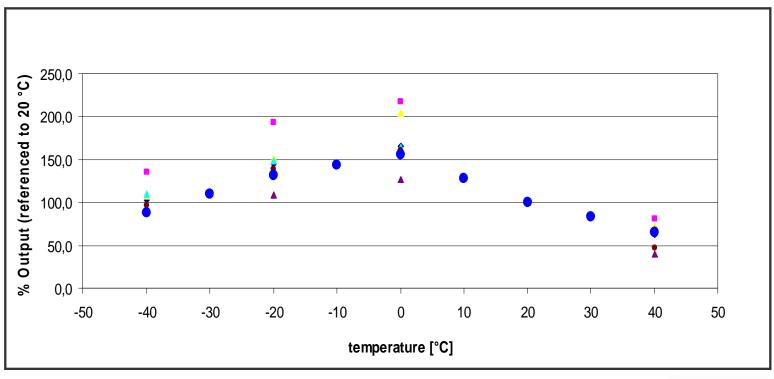


SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



SensoriC NH3 3E 1000

ZERO READING vs. TEMPERATURE:

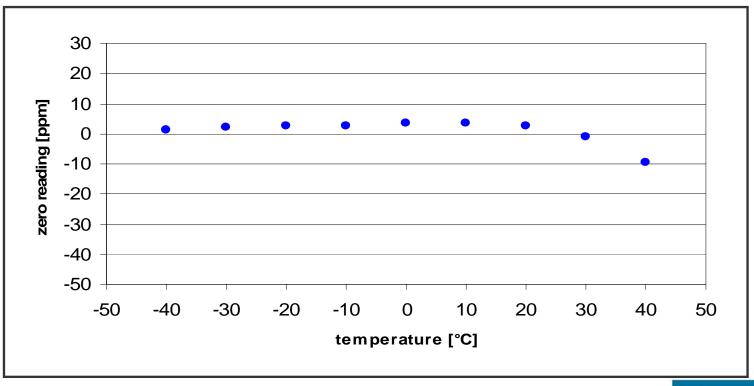

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



SensoriC NH3 3E 1000

CROSS SENSITIVITIES AT 20°C

Gas	Concentration	Reading [ppm] 1.	
Alcohols	1000 ppm	yes / n.d.	
Amines		yes ¹ 2.	
Arsine	0.2 ppm	0	
Carbon Dioxide	5000 ppm	0	
Carbon Monoxide	100 ppm	95	
Chlorine	5 ppm	0	
unsat. Hydrocarbons	% range	yes / n.d.	
Hydrogen	3000 ppm	3000	
Hydrogen Sulfide	20 ppm	40	
Hydrogen Chloride	10 ppm	0	
Nitrogen Dioxide	10 ppm	0	
Phosphine	300 ppm	0	
Sulfur Dioxide	20 ppm	5	

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely

1) Please contact our Technical

Marketing Department for more details Notes:

- Interference factors may differ from sensor to sensor and with life time. It is not advisable to calibrate with interference gases if not otherwise stated.
 - This table does not claim to be complete. The sensor might also be sensitive to other gases.



Distributed by:

for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

Shawcity Ltd 91-92 Shrivenham Hundred Business Park Watchfield, Oxfordshire, SN6 8TY Tel: 01793 780622 Email: sensororders@shawcity.co.uk www.shawcity.co.uk

