

# Chlorine

## SensoriC Cl2 3E 10

# Product Data Sheet

## SensoriC CI2 3E 10

### FEATURES

Amperometric 3 electrode sensor cell  
Low susceptibility to abrupt changes of humidity  
Low interference to SO<sub>2</sub>  
High poison resistance

### TYPICAL APPLICATIONS

Portable & fixed point applications  
TLV monitoring  
Water treatment plants, swimming pools, chemical industry

### PART NUMBER INFORMATION

MINI	0436-032-30009
SENSORIC CLASSIC	0436-032-30069
CTL 4 series adaptation	0436-032-30049
CTL 7 series adaptation	0436-032-30079

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## SensoriC CI2 3E 10

### TECHNICAL SPECIFICATIONS

Measuring Range		0-10 ppm; typically: 0–5 ppm
Sensitivity Range		450 nA/ppm $\pm$ 200 nA/ppm (negative current)
Zero Current at 20°C		< $\pm$ 20 nA
Resolution at 20°C		< 0.05 ppm
Bias Potential	0 mV	
Linearity		< 5% full scale
Response Time at 20°C		
t50		< 30 s calculated from 2 min. exposure time
t90		< 60 s calculated from 2 min. exposure time
Long Term Sensitivity Drift		< 10% per 6 months
Operation Conditions		
Temperature Range		-20°C to + 40°C
Humidity Range		15–90% r.H., non–condensing
Effect of Humidity		no effect on zero current
Sensor Life Expectancy		> 24 months in air
Warranty		12 months


SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## SensoriC CI2 3E 10

### OUTPUT vs. TEMPERATURE:

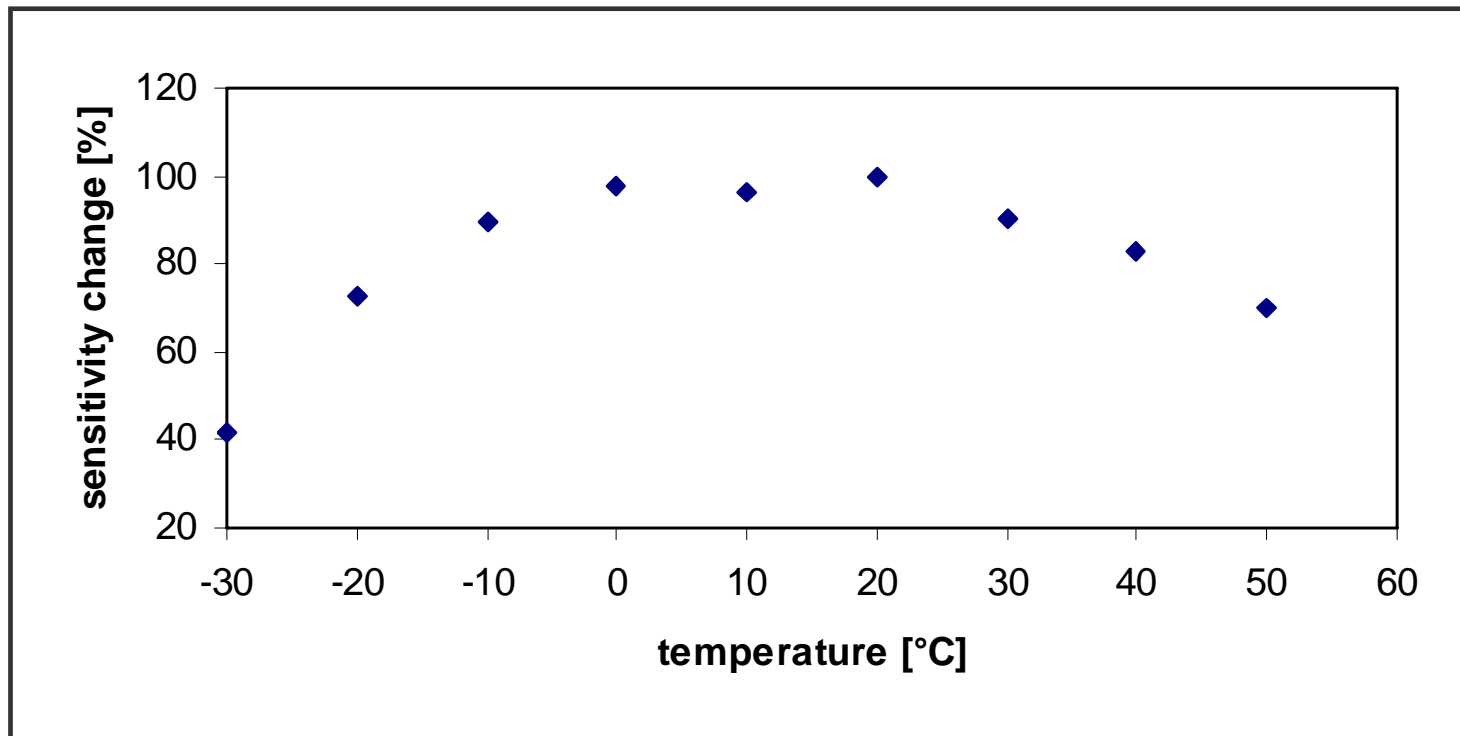


SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## SensoriC CI2 3E 10

### ZERO READING vs. TEMPERATURE:

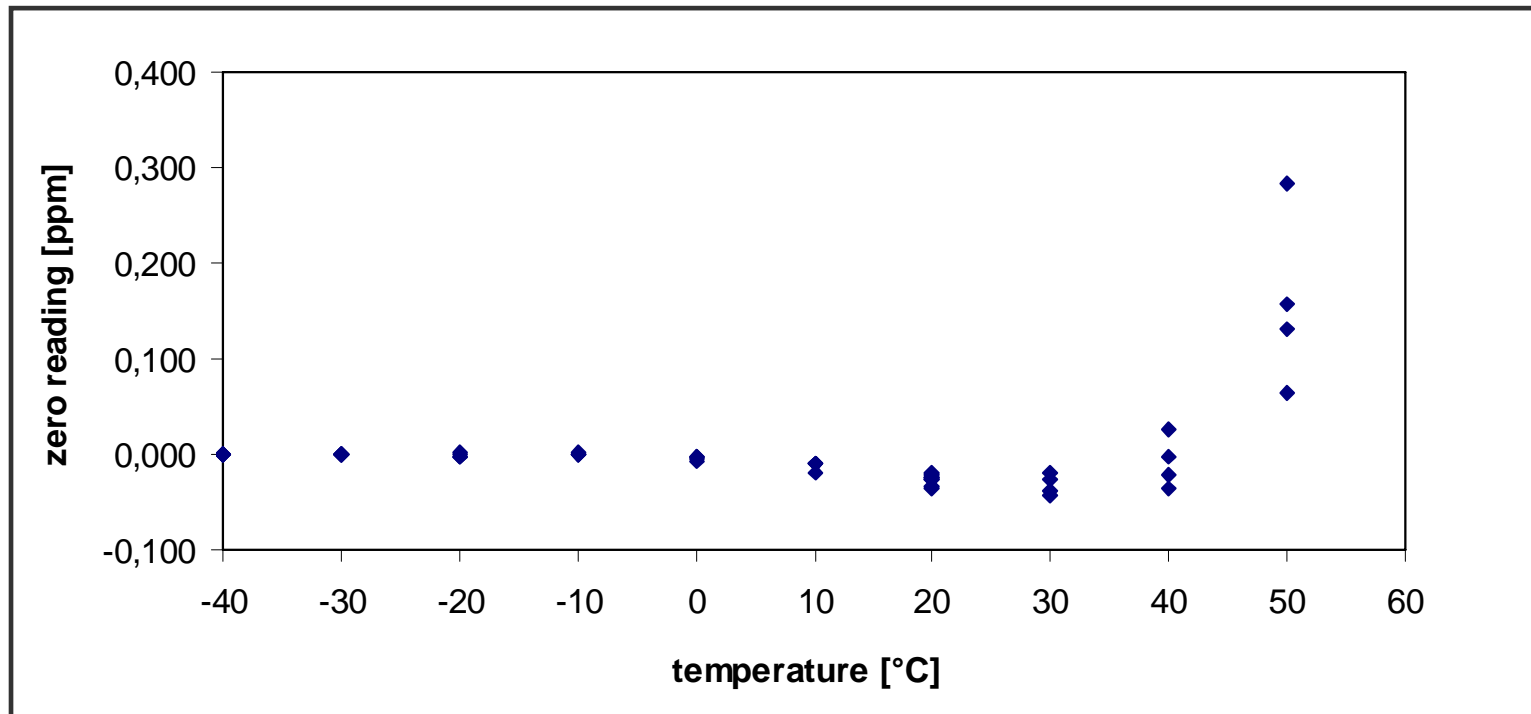

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## SensoriC Cl2 3E 10

### CROSS SENSITIVITIES AT 20°C

Gas	Concentration	Reading [ppm]
Ammonia	100 ppm	0
Bromine	1 ppm	1.0 (theoretical)
Carbon Dioxide	1 %	0
Carbon Monoxide	100 ppm	0
Chlorine Dioxide	2.4 ppm	0.55
Hydrogen	3000 ppm	0
Hydrogen Sulfide	20 ppm	0.1
Nitrogen Dioxide	10 ppm	4.5
Ozone	0.25 ppm	0.11
Sulfur Dioxide	20 ppm	0

#### Notes:

1. Interference factors may differ from sensor to sensor and with life time. It is not advisable to calibrate with interference gases.
2. This table does not claim to be complete. The sensor might also be sensitive to other gases.

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



#### Distributed by:

Shawcity Ltd  
91-92 Shrivenham Hundred Business Park  
Watchfield, Oxfordshire, SN6 8TY  
Tel: 01793 780622  
Email: sensororders@shawcity.co.uk  
www.shawcity.co.uk

