

Ammonia

SensoriC NH3 3E 100 SE



Product Data Sheet

SensoriC NH3 3E 100 SE

FEATURES

Amperometric 3 electrode sensor cell
Very stable zero reading
Very selective
Highly sensitive
Hydrous electrolyte

TYPICAL APPLICATIONS

TLV-monitoring, leakage detection
portable & fixed point applications
Food & Refrigeration Industry, General Industry, Semiconductor Industry

PART NUMBER INFORMATION

MINI	1845-932-30009
SENSORIC CLASSIC	1845-932-30069
CTL 4 series adaptation	1845-932-30049
CTL 7 series adaptation	1845-932-30079

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Product Data Sheet

SensoriC NH3 3E 100 SE

TECHNICAL SPECIFICATIONS

Measuring Range	0–100 ppm
Sensitivity Range	130 nA/ppm \pm 30 nA/ppm
Zero Current at 20°C	< \pm 100 nA
Resolution at 20°C	< 1 ppm
Bias Potential	0 mV
Linearity	< 10% full scale
Response Time at 20°C	
t50	< 20 s calculated from 5 min. exposure time
t90	< 60 s calculated from 5 min. exposure time
Long Term Sensitivity Drift	< 5% per 6 months
Operation Conditions	
Temperature Range	-20°C to +40°C
Humidity Range	15–90% r.H, non–condensing
Effect of Humidity	
Sensor Life Expectancy	> 24 months in air*
Warranty	12 months

Note: SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.


Background concentrations of ammonia might shorten life time of sensor.



Product Data Sheet

SensoriC NH3 3E 100 SE

OUTPUT vs. TEMPERATURE:

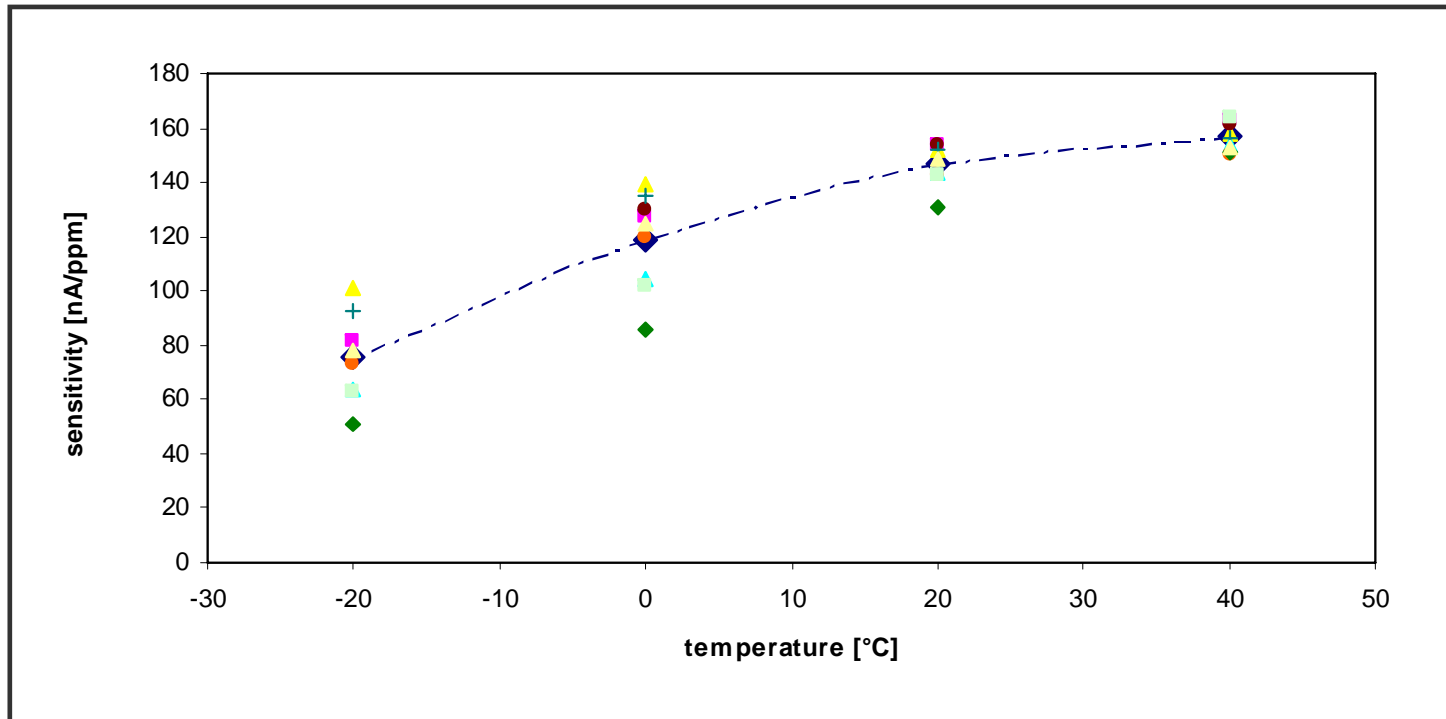


SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Product Data Sheet

SensoriC NH3 3E 100 SE

ZERO READING vs. TEMPERATURE:

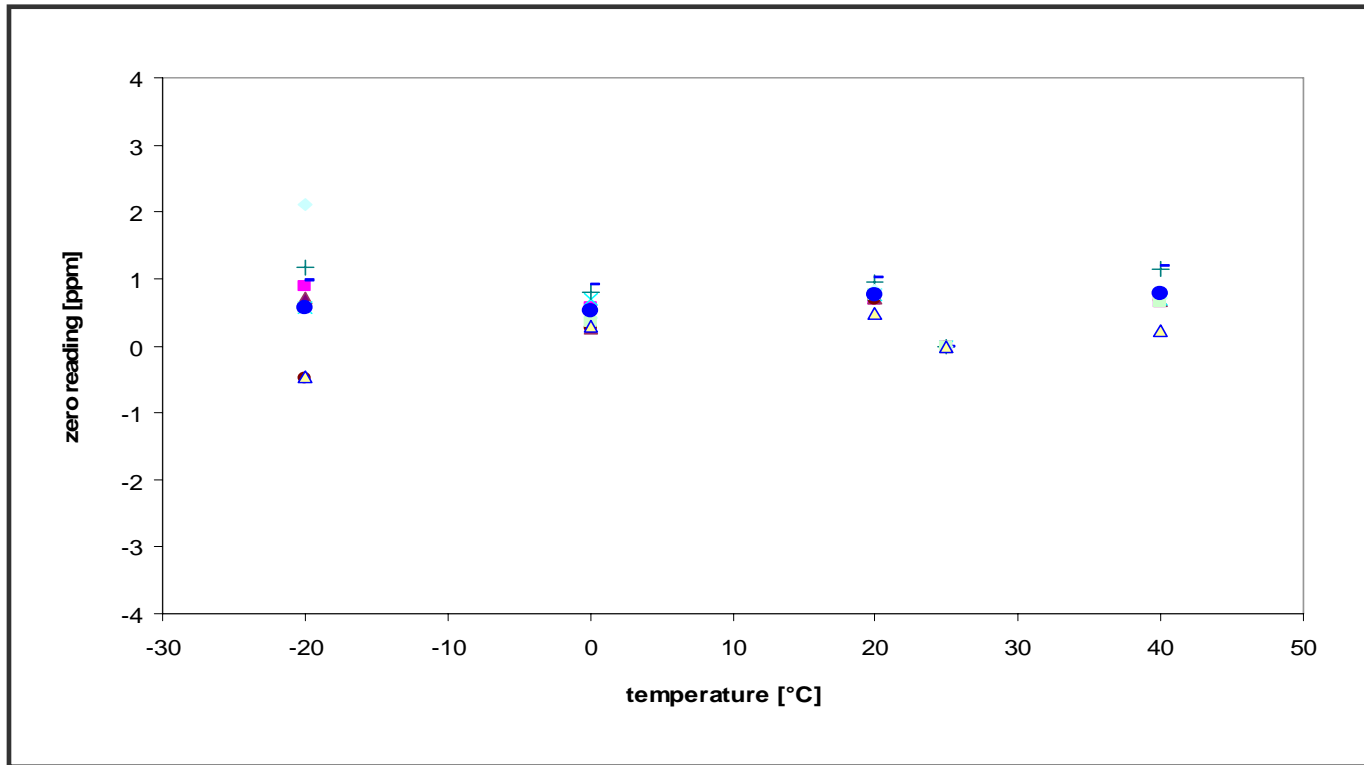

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Product Data Sheet

SensoriC NH3 3E 100 SE

Cross Sensitivities at 20°C

Gas	Concentration	Reading [ppm]
Alcohols	1000 ppm	0
Carbon Dioxide	5000 ppm	0
Carbon Monoxide	100 ppm	0
Hydrocarbons	% range	0
Hydrogen	10000 ppm	0
Hydrogen Sulfide	20 ppm	2 ¹

1) Short gas exposure in minute range.

- Notes:
1. Interference factors may differ from sensor to sensor and with life time. It is not advisable to calibrate with interference gases.
 2. This table does not claim to be complete. The sensor might also be sensitive to other gases.

SensoriC deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which SensoriC assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Distributed by:

Shawcity Ltd
91-92 Shrivenham Hundred Business Park
Watchfield, Oxfordshire, SN6 8TY
Tel: 01793 780622
Email: sensororders@shawcity.co.uk
www.shawcity.co.uk

